

FORZA REFERENCE


GFP25EG-60/60-43

Rating according to BS EN ISO 717-1:1997

Rw(C:Ctr)= 43(-1;-4)dB

Test Number:	AC4301		Air Temperature (°C):	20
Testcentre/Client:	BBRI/Glaverbel S.A		Air Humidity (%):	42
Test Date:	12/02/2007		Receiving room Volume (m³):	49.2
Sample height (m):	1.48		Source Room volume (m3):	50.5
Sample width (m):	1.23		Sample weight (kgs):	104.65
Product:	Pyrobel 25 EG (external Grade)			

Frequency f Hz	Sound Reduction Index, dB	
	1/3 Oct	1/1 Oct
50		29.8
63		
80		
100	28.0	
125	29.8	32.9
160	33.2	
200	31.0	
250	33.7	
315	35.2	36.9
400	35.0	
500	37.9	
630	38.9	
800	40.2	43.0
1000	44.1	
1250	47.8	
1600	51.0	
2000	53.7	53.1
2500	55.8	
3150	57.9	
4000	61.2	
5000	63.2	60.2
6300+		
8000+		
10000+		
Average 100-3150		

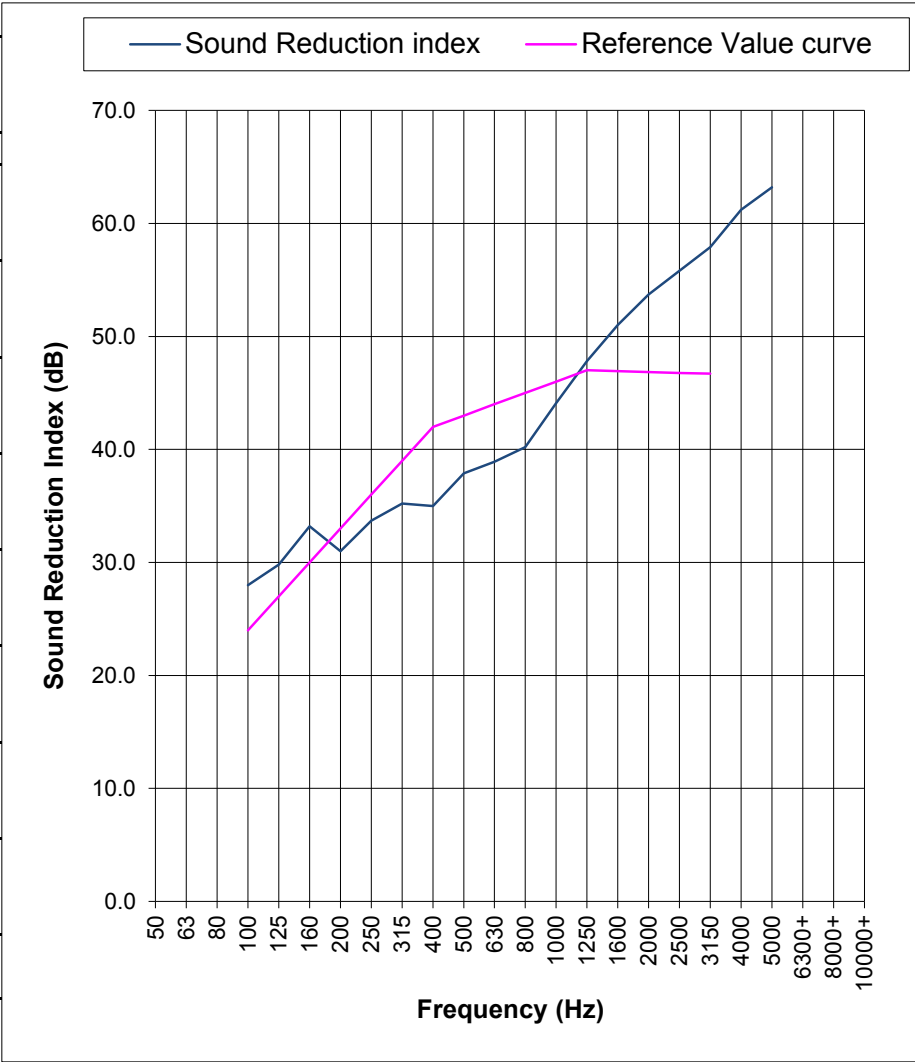

Notes	10mm acoustic putty between timber liner and glass edge



forza-doors.com
01403 711 126
tech@forza-doors.com