

FORZA REFERENCE


GS16.8A41

Rating according to BS EN ISO 717-1:1997

Rw(C:Ctr)=41(-1;-2)dB

Test Number:	AC3668		Air Temperature (°C):	22
Testcentre/Client:	BBRI/Glaverbel S.A		Air Humidity (%):	47
Test Date:	25/09/2003		Receiving room Volume (m³):	49.2
Sample height (m):	1.48		Source Room volume (m3):	50.5
Sample width (m):	1.23		Sample weight (kgs):	74.6
Product:	16.8 AGC Stratophone (88.2)			

Frequency f Hz	Sound Reduction Index, dB	
	1/3 Oct	1/1 Oct
50		33.2
63		
80		
100	33.7	
125	31.5	35.3
160	35.0	
200	34.4	
250	35.7	
315	36.0	37.4
400	36.3	
500	37.4	
630	38.7	
800	38.9	39.1
1000	38.5	
1250	40.0	
1600	42.2	
2000	45.1	44.5
2500	47.9	
3150	51.5	
4000	55.0	
5000	56.7	53.8
6300+		
8000+		
10000+		
Average 100-3150		

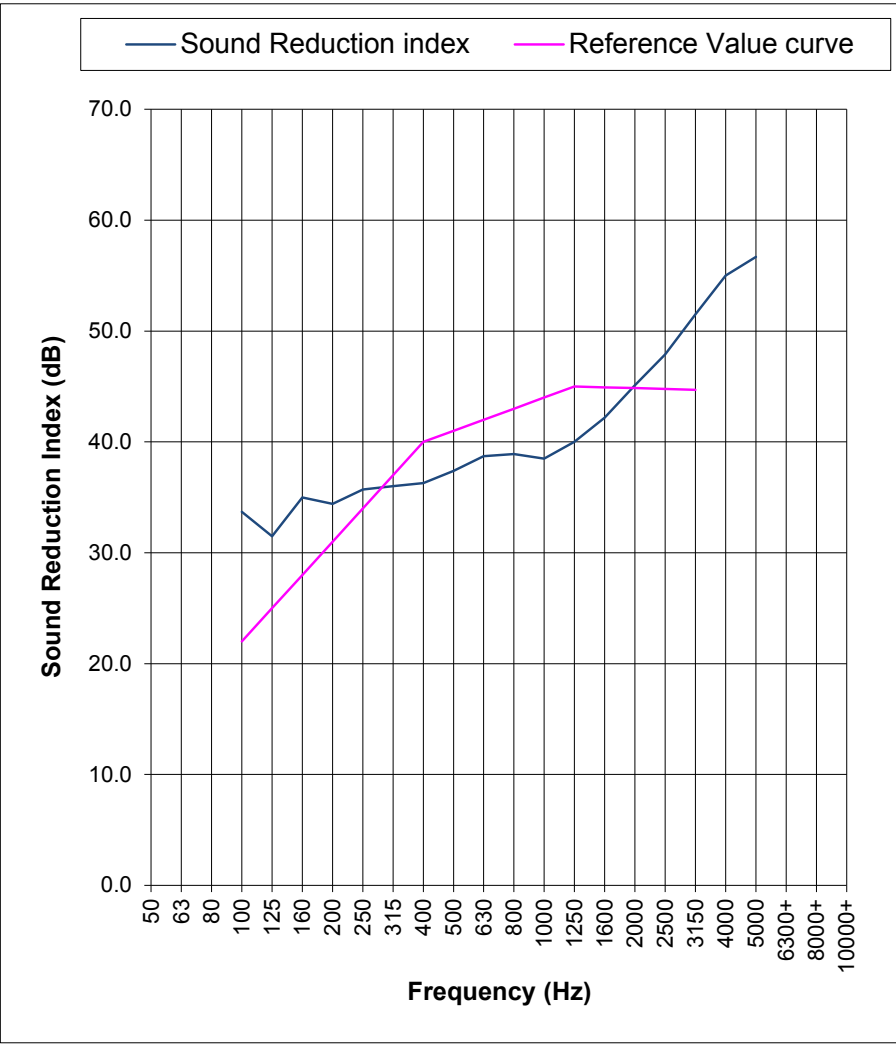

Notes	5mm acoustic putty between timber liner and glass edge



forza-doors.com
01403 711 126
tech@forza-doors.com