

FORZA REFERENCE


GFP25-60/60-40

Rating according to BS EN ISO 717-1:1997

Rw(C:Ctr)= 40(-1;-3)dB

Test Number:	AC4300		Air Temperature (°C):	19.5
Test centre /Client	BBRI/Glaverbel S.A		Air Humidity (%):	29
Test Date:	10/03/2007		Receiving room Volume (m³):	49.2m3
Sample height (m):	1.48m		Source Room volume (m3):	50.5m3
Sample width (m):	1.23m		Sample weight (kgs):	91
Product:	Pyrobel 25			

Frequency f Hz	Sound Reduction Index, dB	
	1/3 Oct	1/1 Oct
50		29.8
63		
80		
100	29.2	
125	29.8	30.1
160	30.5	
200	30.1	
250	28.6	
315	32.5	35.1
400	33.6	
500	35.6	
630	36.7	
800	37.8	40.5
1000	41.6	
1250	45.2	
1600	48.3	
2000	51.0	50.5
2500	53.7	
3150	55.6	
4000	59.8	
5000	61.5	58.2
6300+		
8000+		
10000+		
Average 100-3150		

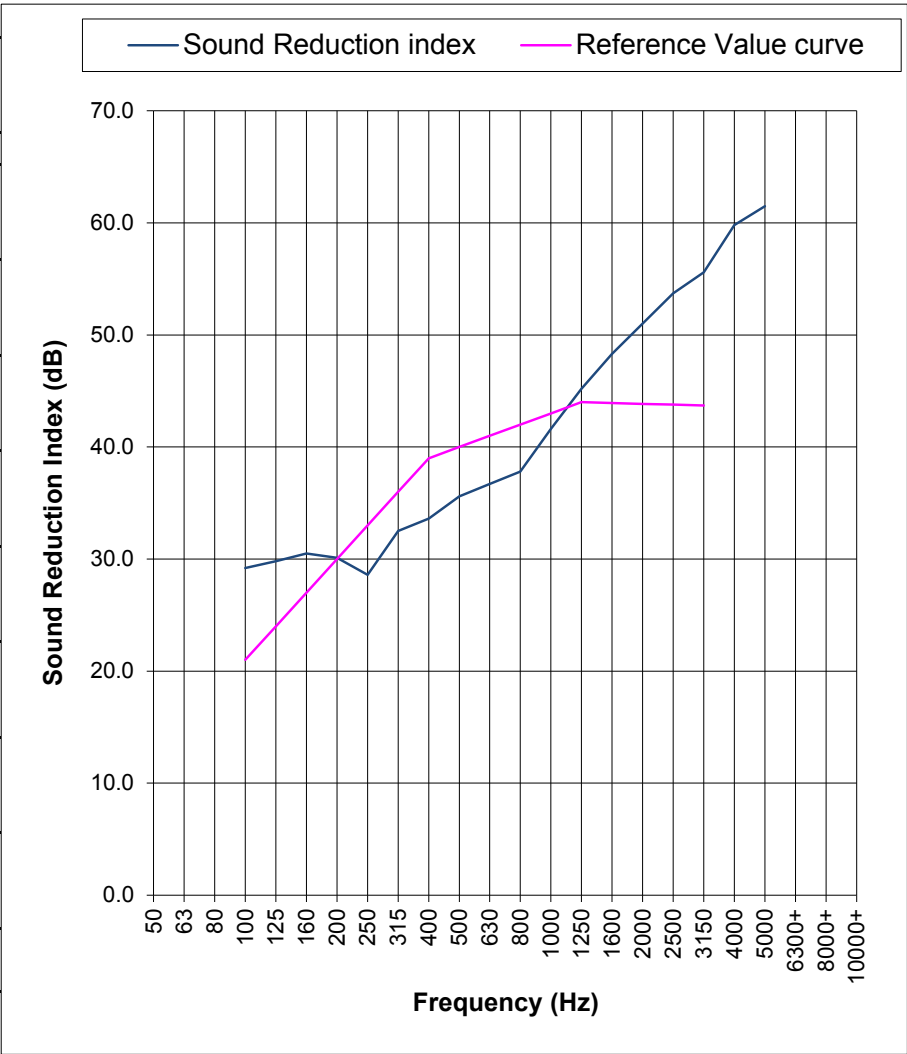

Notes	10mm acoustic putty between timber liner and glass edge



forza-doors.com
01403 711 126
tech@forza-doors.com